

# AC144 Series



Low Cost Miniature Industrial Multipurpose Accelerometer, Top Exit  
2 Pin Mini-MIL Connector, 100 mV/g, ±15%

VIBRATION ANALYSIS HARDWARE



## Product Features


Low-Cost mini mil industrial Accelerometer,  
Great for Hard-to-Reach Locations

- ▶ ± 50 g, Dynamic Range
- ▶ 100 mV/g Frequency Response
- ▶ 2 pin Mini-MIL Side Connector

### AC144-1D

2 Pin Mini Mil Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common




Stock Product

### AC144-2D

CB110 Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

### AC144-3D

CB206 Armored Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

### AC144-6D

CB611 Heavy Duty Armored Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

### AC144-6N

CB111 Integral Cable


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC144	M/AC144	<b>Environmental</b>		
Sensitivity (±15%)		100 mV/g	Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (±3dB)	36-600,000 CPM	0.6-10000 Hz	Maximum Shock Protection		5,000 g, peak
Dynamic Range		± 50 g, peak	Electromagnetic Sensitivity		CE
<b>Electrical</b>			Sealing		Welded, Hermetic
Settling Time	<2.5 seconds		Submersible Depth	200 ft.	60 m
Voltage Source (IEPE)	18-30 VDC		<b>Physical</b>		
Constant Current Excitation	2-10 mA		Sensing Element		PZT Ceramic
Spectral Noise @ 10 Hz	30 µg/√Hz		Sensing Structure		Shear Mode
Spectral Noise @ 100 Hz	4 µg/√Hz		Weight	2.1 oz	60 grams
Spectral Noise @ 1000 Hz	2 µg/√Hz		Case Material		316L Stainless Steel
Output Impedance	<100 ohm		Mounting		1/4-28
Bias Output Voltage	7-14 VDC		Connector (Non-Integral)		2 Pin mini-MIL (J Series)
Case Isolation	>10 <sup>8</sup> ohm		Resonant Frequency	1,920,000 CPM	26000 Hz
			Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
			Mounting Hardware	1/4-28 Captive Bolt	M6x1 Captive Bolt
			Calibration Certificate		CA10

## Typical Frequency Response

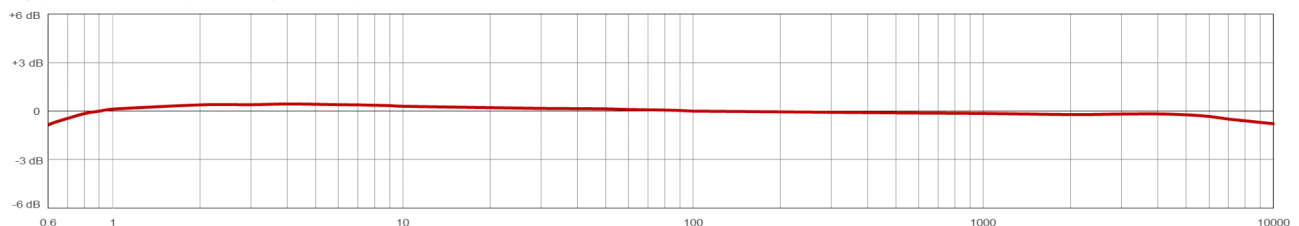

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900