


# CRHT102 Series

High Temperature Cable Reduction Box, Fiberglass Enclosure, NEMA 4X (IP66) Rated, -40 to 212 °F (-40 to 100 °C)



VIBRATION ANALYSIS HARDWARE

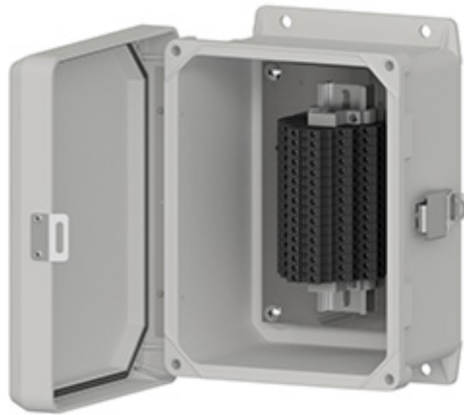


## Product Features

Reduce Cable Clutter in High Temperature Areas

Ideal solution for consolidating cables & reducing costs


- ▶ Can accept 12 or 16 individual signal cables
- ▶ Can reduce cable costs by as much as 75%
- ▶ Reduce up to 16 individual cables to one multi-conductor cable

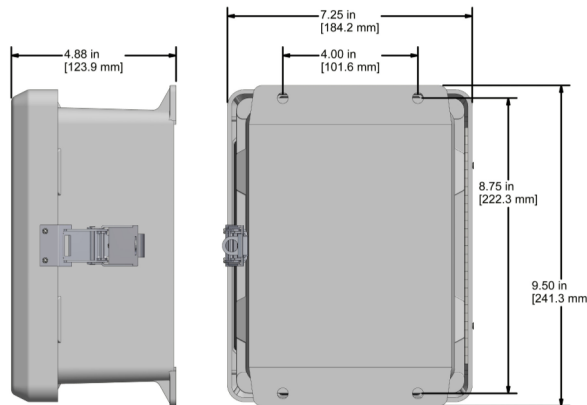

## Specifications

Temperature Range	-40°F to 212°F (-40°C to 100°C)
Enclosure Material	Fiberglass
Inputs	Terminal Block 3 Inputs per Channel (+, -, Shield)
Outputs	Terminal Block 3 Inputs per Channel (+, -, Shield)
Channel Options	12 or 16 Channels
Rating	NEMA 4X (IP66)
Door Closure	Snap Latch
Dimensions	7.72 x 9.61 x 4.61 in (196 x 244 x 117 mm)
Resistance	Resistant to Hose Directed Fluid and Corrosion

## Ordering Information

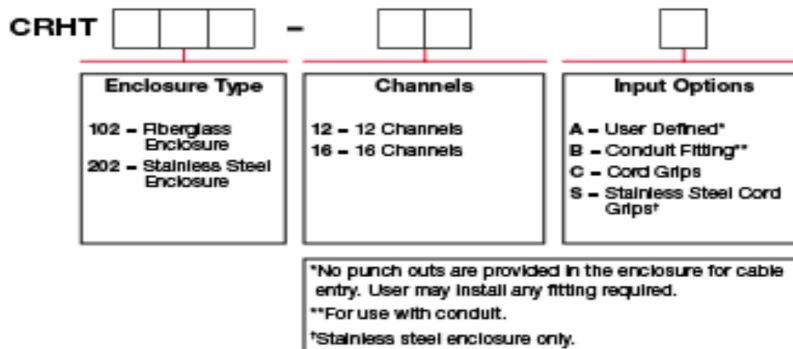

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900